


80级 成套链条吊具

20种精选链条吊具方案 | G80 CHAIN SLING



20+ Lifting Solutions

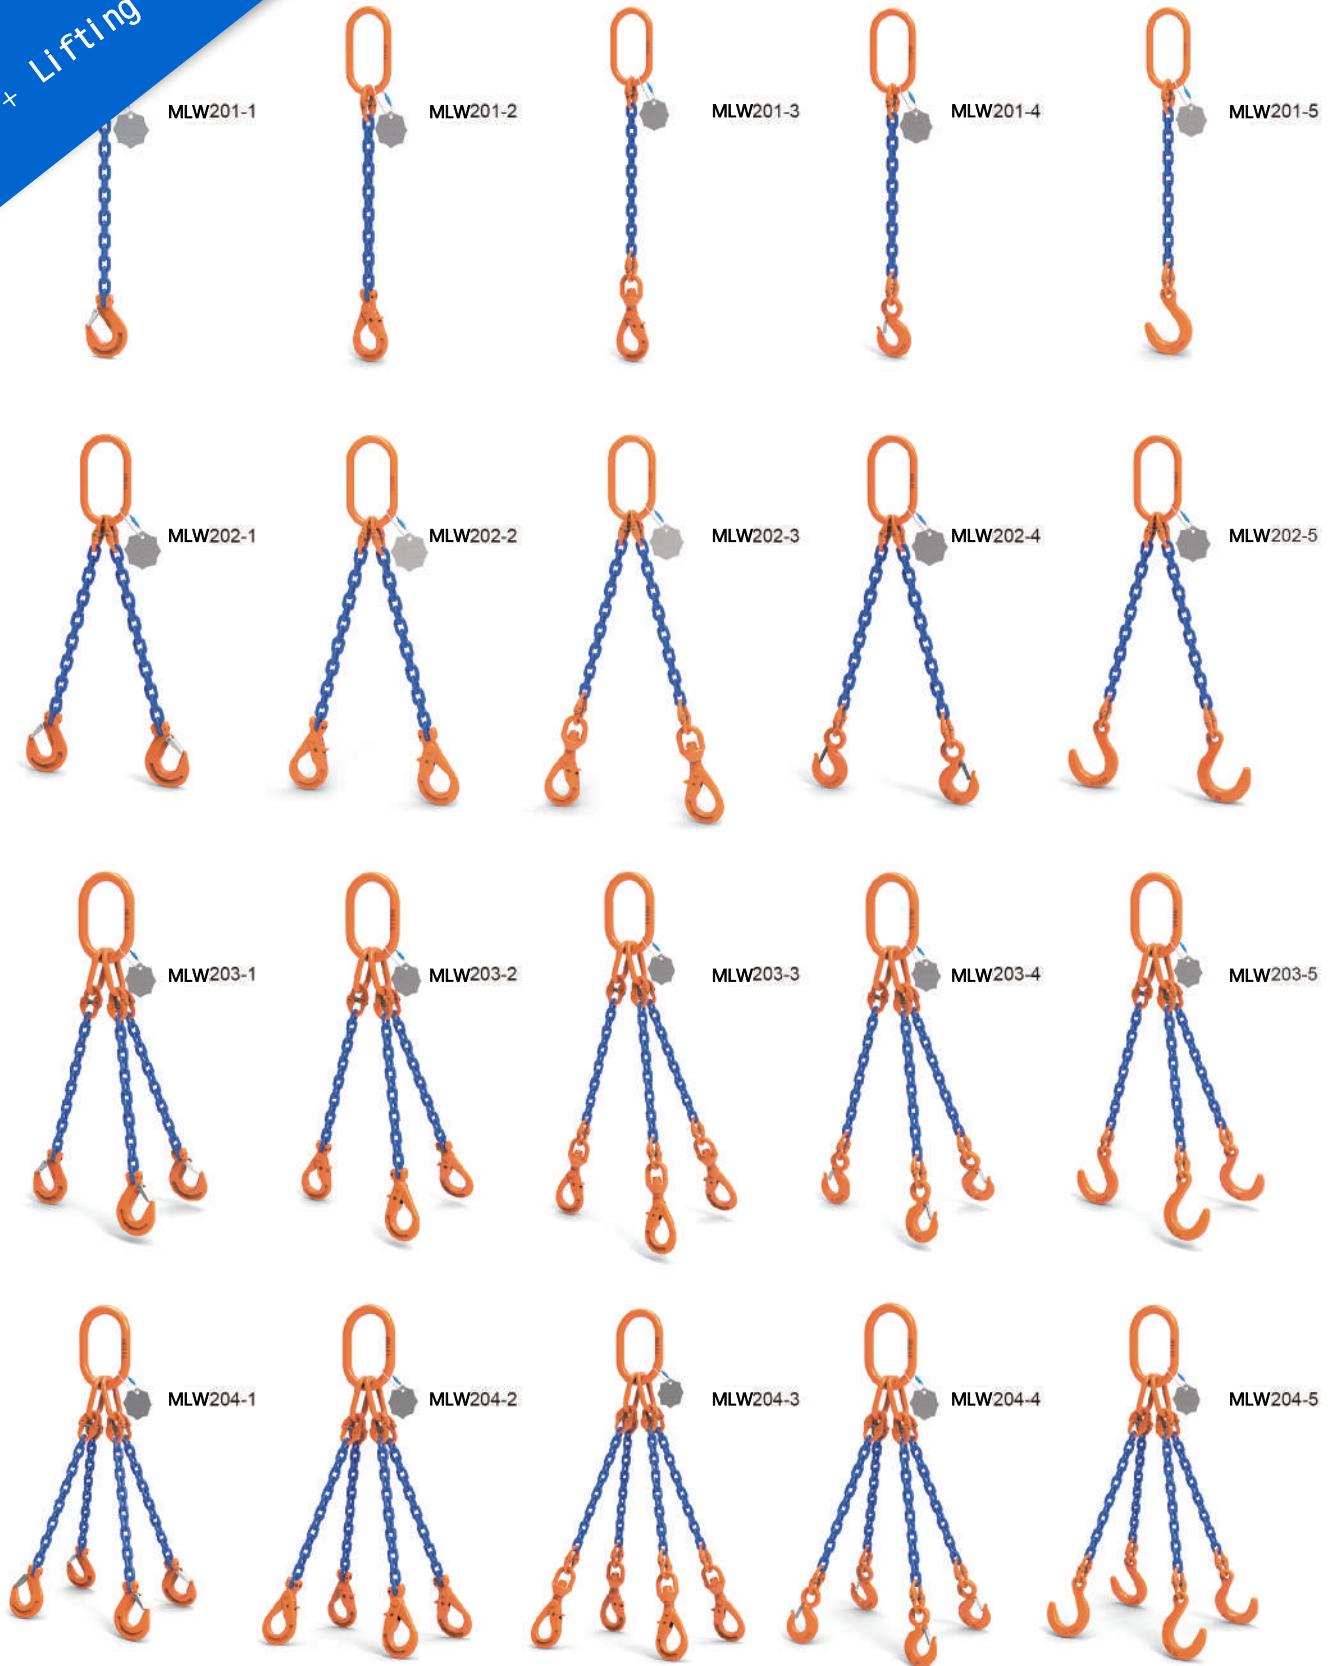

Add: No. 705, Building 1, Zhiyun Building, Linke Middle Road, Hedong District, Tianjin, China

Tel: +86 15122032926

Official website: www.mainlywell.com

E-Mail: info@mainlywell.com

Master link for Single leg/Two legs chain sling (P1)

Master link assembly for Single leg/Two legs chain sling (P2)



单肢、双肢吊具选用强力环 图①

三肢、四肢吊具选用子母环 图②

强力环、子母环通过双环扣 (图③) 和 (图④) 链条链接

Master link/Master link assembly go through connecting link together with chain



G80级吊具4倍安全系数

吊环、双环扣、吊钩 均选用合金钢锻造
链条选用25Mnv链条钢激光对焊

G80 chain sling have 4 times safety factor

Lifting point, Master link assembly, hook all choose from alloy steel. chain material 25 Mnv alloy steel laser butt welding.

MLW201

- 2 -

8

型号说明

Model Description

链环直径 Dia of chain

Hook No.

吊钩编码

1. Clevis sling hook with cast latch
2. Clevis selflock hook
3. Swivel selflock hook
4. Eye sling hook with cast latch
5. Eye foundry hook

1 羊角吊钩

2 羊角安全钩

3 旋转自锁钩

4 美式眼型吊钩

5 眼型大开口钩

品牌产品型号

ITEM NO.

MLW201 Single leg sling

MLW202 Two legs sling

MLW203 Three legs sling

MLW204 Four legs sling

MLW201 单肢吊具

MLW202 双肢吊具

MLW203 三肢吊具

MLW204 四肢吊具

订货时参考型号说明并备注链条长度

Please take reference our item No. and remarks chain length

链条长度 = 链环数量 × 链环直径 × 3

Chain length=chain link quantityxchain ring diax3

羊角吊钩 (图⑤)、羊角安全钩 (图⑥)
带轴销, 可与链条直接连接

P5 Clevis sling hook with cast latch and P6 have pivot pin, it can connect with chain directly





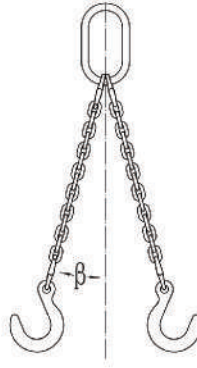
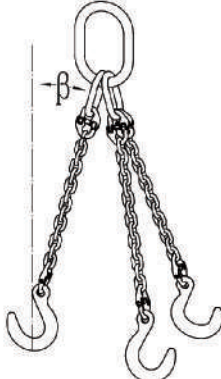
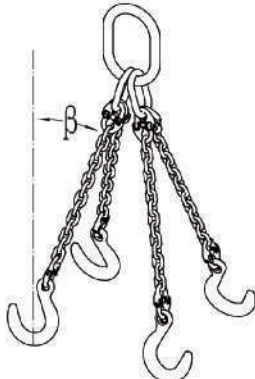
P7 Swivel selflock hook, P8 Eye sling hook with cast latch, P9 Eye foundry hook, need connect connecting link together with chain

旋转自锁钩 (图⑦)、美式自锁钩 (图⑧)、眼型大开口钩 (图⑨), 需用双环扣和链条连接



Safety Information

WLL: t


chain	Single leg sling	two legs sling	Three legs sling	Four legs sling			
							
d mm		β		β		β	
		0° ~ 45°	45° ~ 60°	0° ~ 45°	45° ~ 60°	0° ~ 45°	45° ~ 60°
6	1.12	1.5	1.12	2.3	1.6	2.3	1.6
8	2.00	2.8	2.00	4.2	3.0	4.2	3.0
10	3.15	4.4	3.15	6.6	4.7	6.6	4.7
13	5.30	7.4	5.30	11.1	7.9	11.1	7.9
16	8.00	11.2	8.00	16.8	12.0	16.8	12.0
18	10.00	14.0	10.00	21.0	15.0	21.0	15.0
20	12.50	17.5	12.50	26.2	18.7	26.2	18.7
22	15.00	21.0	15.00	31.5	22.5	31.5	22.5
26	21.20	29.6	21.20	44.5	31.8	44.5	31.8
32	31.50	44.1	31.50	66.1	47.2	66.1	47.2

Optional chain adjuster to adjust chain length




LIFTING SLING ACCESSORIES SERIES

MASTER LINK

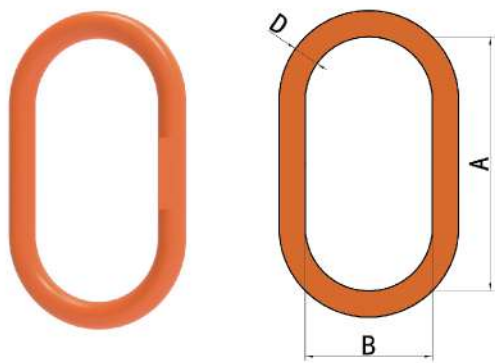


ITEM NO.	specifications	WLL/T	Dimensions/mm		
			A	B	D
MLW211-6	1/2"	2.0	127	63.5	14
MLW211-8	5/8"	3.0	152	76.0	16
MLW211-10	3/4"	4.7	140	70.0	20
MLW211-13	7/8"	8.0	178	89.0	22
MLW211-16	1"	11.0	178	89.0	25
MLW211-18	1-1/4"	16.0	220	110.0	32
MLW211-20	1-1/2"	21.7	270	140.0	38
MLW211-22	1-3/4"	28.4	305	152.0	45
MLW211-26	2"	35.0	350	190.0	50
MLW211-32	2-1/4"	45.0	400	200.0	56

MASTER LINK ASSEMBLY

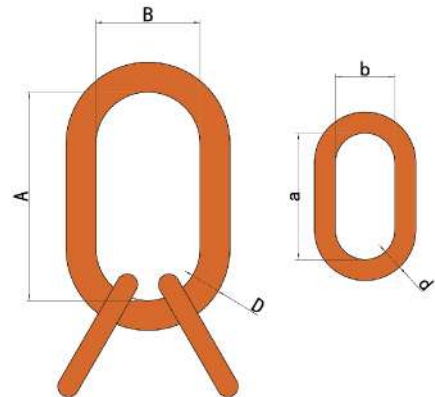


ITEM NO.	specifications	WLL/T	Dimensions/mm					
			A	B	D	a	b	d
MLW212-6	3/4"	4.7	140	70	20	85	40	14
MLW212-8	7/8"	8.0	178	89	22	85	40	18
MLW212-10	1"	11.0	178	89	25	100	60	20
MLW212-13	1-1/4"	16.0	220	110	32	100	60	22
MLW212-16	1-1/2"	21.7	270	140	38	180	100	28
MLW212-18	1-3/4"	28.4	305	152	45	180	100	32
MLW212-20	2"	35.0	350	190	50	180	100	35
MLW212-22	2-1/5"	45.0	400	200	56	200	110	40
MLW212-26	2-1/2"	50.0	406	203	63	200	110	45
MLW212-32	2-4/5"	65.0	450	250	70	200	110	50

CONNECTING LINK

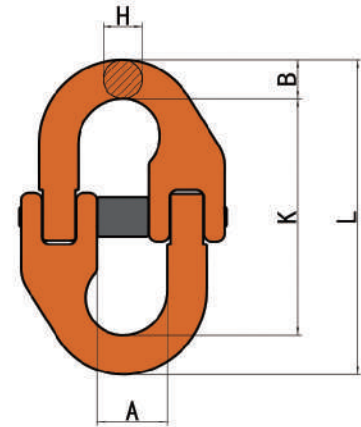


ITEM NO.	WEIGHT/KG	WLL/T	Dimensions/mm				
			A \pm 1.5	B \pm 1	L \pm 2.5	K \pm 2	H \pm 1
MLW214-6	0.080	1.12	15.0	7.5	58.0	42.0	7.0
MLW214-8	0.146	2.00	18.0	9.5	79.5	60.5	8.5
MLW214-10	0.300	3.15	25.0	12.0	90.5	68.0	11.5
MLW214-13	0.650	5.30	29.0	15.0	117.0	87.0	15.0
MLW214-16	1.150	8.00	34.5	19.8	148.0	108.4	19.8
MLW214-18	1.840	10.00	38.0	21.0	154.0	112.0	21.0
MLW214-20	2.100	12.50	41.0	24.0	169.5	121.5	24.0
MLW214-22	2.870	15.00	48.0	26.0	193.5	141.5	26.0
MLW214-26	4.500	21.20	57.5	31.0	220.0	158.0	30.0
MLW214-32	8.210	31.50	67.0	38.0	281.0	205.0	37.0

Clevis sling hook with cast latch

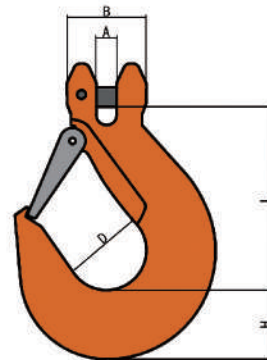


ITEM NO.	specifications	WLL/T	Dimensions/mm						WEIGHT/KG
			A	B	D	H	L	E	
MLW221-6	6-8	1.12	7.5	31.4	30.0	21.0	69.6	16.0	0.32
MLW221-8	7/8-8	2.00	9.5	37.0	38.6	26.3	87.9	25.0	0.57
MLW221-10	10-8	3.15	12.0	48.0	44.6	34.3	105.5	27.0	1.20
MLW221-13	13-8	5.30	15.8	56.5	55.3	40.6	125.6	35.0	2.00
MLW221-16	16-8	8.00	18.5	71.5	64.0	47.6	156.0	43.0	3.70
MLW221-20	20-8	12.50	24.0	88.5	75.5	56.5	186.5	52.0	6.00
MLW221-22	22-8	15.00	28.0	90.0	98.0	63.0	205.0	68.0	10.40
MLW221-26	26-8	21.20	31.1	116.0	114.0	75.0	245.4	85.0	14.50
MLW221-32	32-8	31.50	35.0	150.0	140.0	88.0	317.0	106.0	27.00

CLEVIS SELFLOCK HOOK

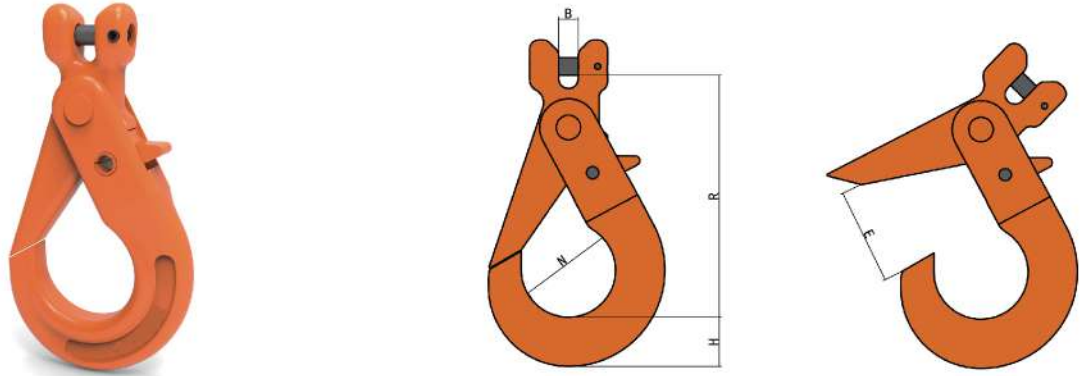


ITEM NO.	specifications	WLL/T	Dimensions/mm					WEIGHT/KG
			B±1	H±2	E±2	N±2	R±3	
MLW222-6	6-8	1.12	8.0	19.5	35	28.0	96.0	0.44
MLW222-8	7/8-8	2.00	9.5	24.0	40	35.8	119.3	0.80
MLW222-10	10-8	3.15	12.5	30.0	50	45.0	142.0	1.38
MLW222-13	13-8	5.30	15.0	40.0	60	52.5	179.0	2.81
MLW222-16	16-8	8.00	18.5	50.5	65	63.3	224.8	6.00
MLW222-20	18/20-8	2.50	25.0	55.0	80	86.0	238.3	7.25
MLW222-22	22-8	15.00	25.0	67.0	83	76.0	277.0	12.80
MLW222-26	26-8	21.20	30.0	75.0	106	96.0	321.0	21.80
MLW222-32	32-8	31.50	35.0	97.0	140	135.0	416.0	49.60

SWIVEL SELFLOCK HOOK

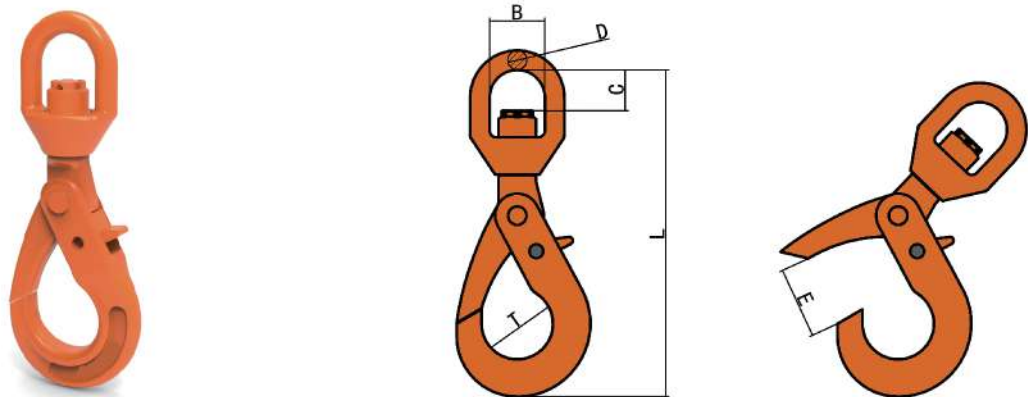


ITEM NO.	specifications	WLL/T	Dimensions/mm						WEIGHT/KG
			B±1	C±1	E±2	T±2	D±1	L±3	
MLW223-6	6-8	1.12	32.5	24.0	35	28.0	11.5	119.5	0.71
MLW223-8	7/8-8	2.00	36.0	29.5	40	35.8	12.7	149.1	1.15
MLW223-10	10-8	3.15	42.0	35.0	50	48.0	15.0	180.0	1.86
MLW223-13	13-8	5.30	50.0	41.0	60	52.5	17.5	231.5	3.51
MLW223-16	16-8	8.00	61.0	56.8	65	63.3	21.5	288.5	7.33
MLW223-20	18/20-8	12.50	72.0	63.0	80	76.0	26.0	309.0	10.30
MLW223-22	22-8	15.00	97.0	98.0	83	86.0	33.0	359.0	17.50
MLW223-26	26-8	21.20	123.0	115.0	106	96.0	42.0	408.0	23.00
MLW223-32	32-8	31.50	140.0	146.0	140	135.0	52.0	537.6	81.00

Eye sling hook with cast latch

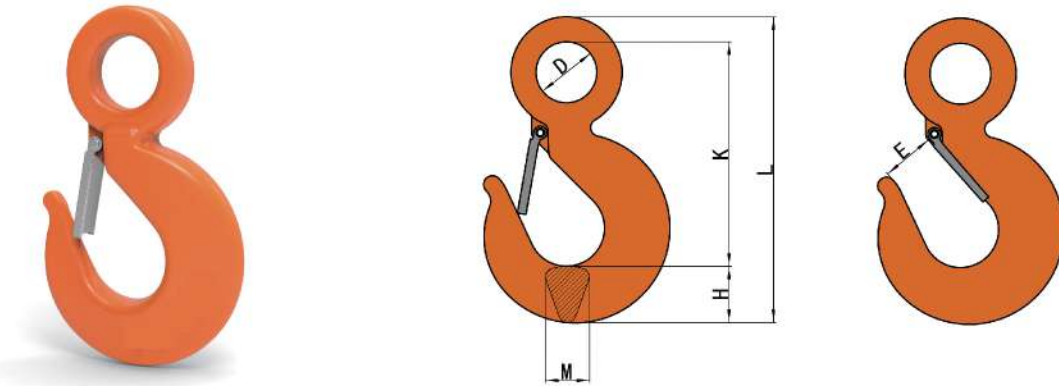

ITEM NO.	WLL/T	Dimensions/mm						WEIGHT/KG
		D±0.6	E±2	H±1.5	K±2.5	M±5	L±3	
MLW224-6	0.75	16.5	19.0	17.0	72.0	16.0	97.0	0.21
MLW224-8	1.00	19.0	22.0	19.0	82.0	16.0	110.0	0.28
MLW224-10	1.50	23.0	23.0	21.0	93.5	17.5	125.0	0.40
MLW224-13	2.00	28.0	24.0	26.0	103.0	21.0	140.5	0.65
MLW224-16	3.00	31.0	27.5	28.0	119.0	23.0	162.0	0.81
MLW224-18	5.00	39.0	33.0	37.0	146.0	30.0	201.0	1.75
MLW224-20	7.00	51.0	40.0	46.5	186.5	38.0	256.0	3.77
MLW224-22	11.00	62.0	51.0	57.0	231.5	46.0	317.0	6.80
MLW224-26	15.00	73.0	57.0	70.0	260.0	55.0	360.0	9.96
MLW224-30	22.00	89.0	75.0	76.0	318.0	68.5	434.0	15.33
MLW224-32	30.00	90.0	82.0	91.0	360.0	70.0	495.5	27.20

EYE FOUNDRY HOOK

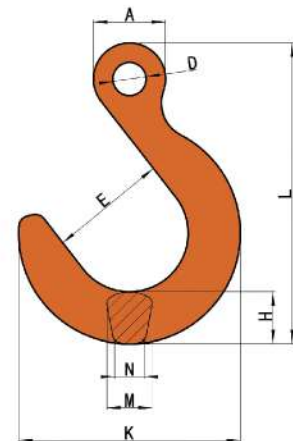

ITEM NO.	WLL/T	Dimensions/mm								WEIGHT/KG
		E±1.2	A±1	D±1	H±1	M±1	N±0.5	K±2	L±2	
MLW225-8	2.00	63.5	39.0	18.0	31.0	5.4	18	120	163	1.09
MLW225-10	3.15	76.0	50.8	22.0	38.0	32.6	23	146	200	2.04
MLW225-13	5.30	89.0	63.5	27.0	44.5	38.1	27	171	238	3.22
MLW225-16	8.00	102.0	76.0	32.0	52.0	46.0	32	198	278	5.53
MLW225-20	12.50	114.5	89.0	38.0	65.0	55.0	39	232	325	8.75
MLW225-22	15.00	127.5	102.0	45.0	69.0	57.0	40	256	361	11.93
MLW225-26	21.20	140.0	126.0	67.5	77.0	66.0	45	283	402	16.80
MLW225-32	31.50	153.5	151.5	81.5	97.5	80.0	58	327	461	26.60